

# ELECTROMYOGRAPHY ANALYSIS ASSOCIATED WITH PROLONGED STANDING IN METAL STAMPING INDUSTRY

Isa, H.<sup>\*1</sup>, Omar, A.R.<sup>2</sup>, Ismail, A. R.<sup>3</sup>, Seri, R.K.<sup>1</sup>, Hambali, A.<sup>1</sup>,  
Rahman, M.A.<sup>1</sup>, and Rohana, A.<sup>4</sup>

<sup>1</sup>Faculty of Manufacturing Engineering, Universiti Teknikal Malaysia Melaka, Durian Tunggal, 76100 Melaka, Malaysia.

<sup>2</sup>Faculty of Mechanical Engineering, Universiti Teknologi MARA, 40000 Shah Alam, Selangor, Malaysia.

<sup>3</sup>Faculty of Mechanical Engineering, Universiti Malaysia Pahang, 26600 Pekan, Pahang, Malaysia.

<sup>4</sup>Faculty of Engineering Technology, Universiti Teknikal Malaysia Melaka, Durian Tunggal, 76100 Melaka, Malaysia.

Email: <sup>\*</sup>isa@utem.edu.my; <sup>2</sup>aro@salam.edu.my; <sup>3</sup>arasdan@gmail.com;  
<sup>1</sup>seri@utem.edu.my; <sup>4</sup>rohana\_abdullah@utem.edu.my

**ABSTRACT:** Many jobs in metal stamping industry require workers to perform in standing position. Standing is a practical working position when the workers are lifting heavy products, and pushing or pulling excessive loads because those jobs require a stable position and large degree of freedom. However, if the workers perform the jobs continuously in standing throughout the working hours, they may be experience muscle fatigue. The objective of this study such as to measure the myoelectric levels ( $\mu\text{V}$ ) exerted by the left and right erector spinae, left and right tibialis anterior. The myoelectric levels in the muscles were measured using surface Electromyography (sEMG). Ten production workers from a metal stamping industry participated as subjects for sEMG measurement. Out of which, five workers from metal stamping process lines and another five from handwork section. The muscle activity of the subjects was measured for 5 hours and 45 minutes of continuous standing during beginning of workday, middle of workday, and end of workday from Monday to Wednesday. Results of comparison found that the two groups of workers show significant difference ( $p\text{-value} < 0.05$ ) in myoelectric level in the right erector spinae, right gastrocnemius, and left tibialis anterior during the beginning of workday. However, the two groups of workers did not show any significant difference in myoelectric level during the middle of the workday and end of the workday. It can be concluded that muscle activity of the workers

was determined by the work load and duration of standing. This study suggests that anti fatigue mat and micro breaks should be provided to the workers to reduce muscle fatigue.

**KEYWORDS:** *Prolonged Standing, Muscle Activity, sEMG, Stamping Process, Handwork Section.*

## 1.0 INTRODUCTION

Standing can be hypothesized as a flexible position because it is easy for moving and having large degree of freedom. Standing can be classified by two types; dynamic and stationary postures. Dynamic standing is a position in which a person intermittently walks while he or she is performing the activities. On the other hand, stationary standing is a position in which a worker does not walk, but at standstill [1]. In industrial workplaces, numerous processes jobs are recommended to be performed in standing position. For example, standing position is commonly practiced for manufacturing works such as welding and machining processes. In addition, standing is preferred when the workstation does not allow the workers to comfortably position their legs under the working table due to insufficient clearance. For instance, operating a lathe machine or metal stamping machine is impossible to do in sitting position because the design of the machines does not provide adequate space for the workers to position their legs under the machine. However, when the workers spent more than 50% of the total working hours during a full work shift in standing position, they are considered to be exposed to prolonged standing [2].

sEMG is one of the scientific instruments that has been applied to quantify muscle activity of workers while performing tasks in prolonged standing [3-9]. It quantifies the effort level of muscle in terms of myoelectric levels, expressed in micro volt ( $\mu\text{V}$ ) corresponding to contraction of the muscles while handling the work load. For instance, if the myoelectric levels are high, it means that the muscles are exerting high effort while performing the particular tasks. There is very minimal study explored the effects of prolonged standing on muscle activity been conducted to metal stamping workers in Malaysia [10]. As a consequence, there is a limitation of information in designing a proper work-rest schedule and safe workstation design for workers in metal stamping industry.

The purpose of this study is to quantify the effort level exerted by the left and right erector spinae, left and right tibialis anterior, and left and

right gastrocnemius muscles among two groups of workers (metal stamping process lines and handwork section) while performing tasks in prolonged standing. Additionally, the muscle effort level of these groups was compared to find out which group exerted more effort in the muscles while performing the tasks.

## **2.0 METHODS**

A metal stamping company situated in Malaysia was selected to perform the data collection. In the production department of the company, all workers are males and national citizenship. They worked in two shifts based on a 12-hour shift schedule. In addition, there are two main work departments namely stamping process lines and handwork section. The stamping process lines produced metal stamped parts for vehicle assembly, while the handwork section performed restoration on the products from the metal stamping process lines. All processes jobs in both sections require workers to stand because the nature of jobs are repetitive, frequent movement, and large degree of freedom. In addition, the workers at the stamping process line are exposed to mechanical vibration due to high impact between plungers of stamping machine and die. The cyclic load transfers its vibration to the workers' body through the machine foundation and thus poses whole-body vibration (WBV).

Ten production workers were recruited as subjects in the study. Among them, five workers were selected from the metal stamping process lines, and another five were recruited from the handwork section. The selected subjects represented more than 80% of the total production workers of both departments. To fulfill the basic requirement of this study, only workers who performed processes jobs in prolonged standing and no injuries for the past 12 months were allowed to participate in the experimental work. Demographic of the selected workers from both metal stamping process lines and handwork section are described in Table 1.

All subjects were given a written consent using procedures approved by the Research Ethics Committee of Universiti Teknologi MARA. At the end of experiment, each subject was given a token of appreciation for their participation.

Table 1: Demographic of the workers

Criteria	Metal stamping mean (SD)	Handwork mean (SD)
Gender	male	
Age (year)	24.3 (2.1)	24.6 (4.8)
Body mass (kg)	56.6 (9.3)	60.5 (10.8)
Height (m)	1.67 (0.08)	1.68 (0.08)
Work experience	4.0 (2.4)	4.3 (3.7)

## 2.1 Surface Electromyography

A surface Electromyography (sEMG ME3000P4, MEGA Electronics, Finland) and MegaWin Software were used to record, store and analyze all the data regarding muscle activity of the workers. The measurements of muscle activity were conducted based on real time monitoring. All electrodes were connected to a data logger and the electromyography levels from the data logger are monitored through lap top screen using wireless networking. The sEMG electrodes were attached conscientiously to the subject's skin to measure the activity in the six muscles: left and right erector spinae, left and right tibialis anterior, and left and right gastrocnemius. In the measurement and analysis of standing jobs, the selected muscles are suggested by the established guidelines [11] and a recent review article [12]. To ensure the sEMG protocols were complied, especially on the attachment of electrodes on respective muscles, a physiotherapist was consulted before the evaluation is carried out. Setting of SEMG system during the measurement is based on Surface EMG for the Non-Invasive Assessment of Muscles (SENIAM) [13]. The settings are as follows:

- EMG electrodes: surface electrode Ag/AgCl, 20 mm diameter,
- Distance between electrodes: 25 mm,
- Skin preparation: cleaned,
- Common Mode Rejection Rate (CMMR): 110 dB,
- Filter: Band pass filter (85 Hz – 500Hz), and
- Sampling rate: 1000 Hz.

Before beginning the test, the personal particulars of the subject were recorded in MegaWin Software, and the subject was given sufficient time to get enough practice to familiarize with the sEMG instruments. The subject was also informed that he has to perform the task at his own pace and should immediately report any feeling of pain or discomfort so that the measurement can be terminated. After all the measurement settings are ready, the subject can now start to perform his task. Figure

1 shows the placement of the sEMG electrodes to measure fatigue in the selected muscles.

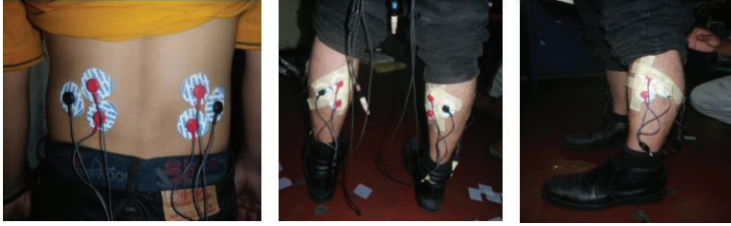


Figure 1: Surface electrodes (Ag/AgCl) are attached over the erector spinae muscles (lower back), gastrocnemius muscles (posterior legs) and tibialis anterior muscles (anterior legs)

In a workday, all muscles were concurrently measured for 5 hours and 45 minutes of continuous standing to quantify the effort level exerted by the muscles. The sEMG measurements were conducted for 1 hour and 15 minutes of standing at the beginning of the workday (9:00 a.m to 10:15 a.m), 2 hours of standing at the middle of the workday (10:30 a.m to 12:30 p.m), and 2 hours and 30 minutes of standing at the end of the workday (2:00 p.m to 4:30 p.m) for three consecutive workdays from Monday to Wednesday. Fifteen minutes of morning break and 90 minutes of lunch break were provided at the beginning of the workday and middle of the workday respectively.

The output parameter from the sEMG measurement is myoelectric levels that are expressed in micro volt ( $\mu\text{V}$ ). Statistical analyses associated with descriptive and comparative analysis were used to interpret the data. In the statistical analysis,  $p\text{-value} < 0.005$  is defined as significant difference.

### **3.0 RESULTS**

Table 2 presents the minimum (min), mean, maximum (max), and standard deviation (SD) of myoelectric levels ( $\mu\text{V}$ ) in each muscle for two groups of workers during beginning of workday. For workers in metal stamping process lines, the lowest myoelectric level was detected in the right gastrocnemius muscle ( $11.4 \mu\text{V}$ ); meanwhile the highest myoelectric level was identified in the left gastrocnemius muscle ( $14.4 \mu\text{V}$ ). In handwork section, the lowest myoelectric level was recorded in the right gastrocnemius muscle ( $12.8 \mu\text{V}$ ); meanwhile the highest myoelectric level was quantified in the right erector spinae muscle ( $25.9 \mu\text{V}$ ). The t-test (Paired Two Sample for Means) with  $\alpha = 0.05$  was

performed to find any significant difference in myoelectric levels in each muscle for two groups of workers. The two groups of workers show significant difference ( $p$ -value  $< 0.05$ ) in myoelectric level in the right erector spinae, right gastrocnemius, and left tibialis anterior, as tabulated in Table 2.

Table 2: Myoelectric levels at beginning of workday  
 Table 2: Myoelectric levels at beginning of workday

Muscles	Metal stamping process lines			Handwork section			<i>P</i> -value
	min	mean	max	min	mean	max	
ES(L)	12	13	15	12	13.6	15	0.30
ES(R)	12	13.2	14	14	15.6	18	0.04*
GS (L)	13	14.4	16	14	15.2	16	0.24
GS (R)	11	11.4	12	12	12.8	14	0.005*
TA (L)	10	11.8	14	12	13	14	0.03*
TA (R)	13	14.2	15	14	15.6	17	0.13

\* : Significant difference ( $p$ -value  $< 0.05$ )

ES (L): Left erector spinae

ES (R): Right erector spinae

GS (L): Left gastrocnemius

GS (R): Right gastrocnemius

TA(L): Left tibialis anterior

TA(R): Right tibialis anterior

Table 3 presents the minimum (min), mean, maximum (max), and standard deviation (SD) of myoelectric levels ( $\mu$ V) in each muscle for two groups of workers during middle of workday. For workers in metal stamping process lines, the lowest myoelectric level was detected in the left erector spinae muscle (14.4  $\mu$ V); meanwhile the highest myoelectric level was identified in the right tibialis muscle (17.6  $\mu$ V). In handwork section, the lowest myoelectric level was recorded in the left erector spinae muscle (14  $\mu$ V); meanwhile the highest myoelectric level was quantified in the right tibialis anterior muscle (18  $\mu$ V). The t-test (Paired Two Sample for Means) with  $\alpha = 0.05$  was performed to find any significant difference in myoelectric levels in each muscle for two groups of workers. The two groups of workers did not show any significant difference in myoelectric level, as tabulated in Table 3.

Table 3: Myoelectric levels at middle of workday

Muscles	Metal stamping process lines			Handwork section			<i>P</i> -value
	min	mean	max	min	mean	max	
ES(L)	12	14.4	16	7	14	18	0.85
ES(R)	15	16	17	14	16.8	19	0.41
GS (L)	16	17.4	19	15	17.4	19	1.0
GS (R)	13	14.2	16	13	14.4	16	0.85
TA (L)	13	14.8	18	13	14.8	17	1.0
TA (R)	15	17.6	20	16	18	20	0.78

\* : Significant difference ( $p$ -value  $< 0.05$ )

ES (L): Left erector spinae  
 GS (L): Left gastrocnemius  
 TA(L): Left tibialis anterior

ES (R): Right erector spinae  
 GS (R): Right gastrocnemius  
 TA(R): Right tibialis anterior

Table 4 presents the minimum (min), mean, maximum (max), and standard deviation (SD) of myoelectric levels ( $\mu\text{V}$ ) in each muscle for two groups of workers during end of workday. For workers in metal stamping process lines, the lowest myoelectric level was detected in the left tibialis muscle (11.4  $\mu\text{V}$ ); meanwhile the highest myoelectric level was identified in the left gastrocnemius muscle (17.8  $\mu\text{V}$ ). In handwork section, the lowest myoelectric level was recorded in the right gastrocnemius muscle (16.4  $\mu\text{V}$ ); meanwhile the highest myoelectric level was quantified in the left tibialis anterior muscle (23.2  $\mu\text{V}$ ). The t-test (Paired Two Sample for Means) with  $\alpha = 0.05$  was performed to find any significant difference in myoelectric levels in each muscle for two groups of workers. The two groups of workers did not show any significant difference in myoelectric level, as tabulated in Table 4.

Table 4: Myoelectric levels at end of workday

Muscles	Metal stamping process lines			Handwork section			<i>P-value</i>
	min	mean	max	min	mean	max	
ES(L)	12	15.2	18	15	18.5	21	0.15
ES(R)	11	16.2	19	14	17.8	22	0.37
GS (L)	14	17.8	20	15	20	23	0.32
GS (R)	11	14.8	17	12	16.4	19	0.40
TA (L)	10	14.4	17	23	23.2	48	0.03
TA (R)	14	17.6	21	15	20.4	24	0.36

\* : Significant difference (p-value < 0.05)

ES (L): Left erector spinae  
 GS (L): Left gastrocnemius  
 TA(L): Left tibialis anterior

ES (R): Right erector spinae  
 GS (R): Right gastrocnemius  
 TA(R): Right tibialis anterior

#### 4.0 DISCUSSION

This study has conducted an analysis of muscle activity of production workers in a metal stamping company. In the company, there were metal stamping process lines and handwork section. Both work departments required workers to perform jobs in standing for prolonged time periods. All workers worked on a 12-h shift schedule. Workers at the metal stamping process lines worked day shift only; meanwhile, workers at the handwork section worked both day and night shifts. It was observed that the workers spent about 80% of the working hours in standing (only sitting during breaks) throughout the 12-h working period. This is due to the activities at both work departments required the workers to move frequently with large degree of freedom. For



instance, workers at the metal stamping process lines have to reach the workpieces from the pallet on the floor and feed the workpieces to the stamping machine, synchronize with the machine speed. Thus, the process would be practicable in standing as it requires frequent movement. On the hand, workers in handwork section were assigned to perform repair and restoration works on the products that produced by the metal stamping process. Hence grinding and knocking processes using manual method are the major activities at the handwork section. Similar to metal stamping process lines, all workers at the handwork section performed the jobs in standing position because they have to move in large degree of freedom, especially while performing grinding process on huge products.

This study observed that muscle fatigue occurred particularly in the lower back (erector spinae muscle), posterior leg (gastrocnemius muscle), and anterior leg (tibialis anterior muscle) due to above mentioned working conditions. Furthermore there were complaints of fatigue in those body parts from the workers of metal stamping process lines and handwork section [14]. Through sEMG measurement, this study identified that the average of myoelectric levels ( $\mu\text{V}$ ) in the muscles of handwork section workers are higher than workers of metal stamping lines during beginning, middle and end of the workday. This study believed that different of myoelectric levels occurred when the postures of workers in the handwork section were deviated significantly from neutral position especially when they performed the grinding and knocking processes in bending, extension, forward and side flexion thus placed more stress in the back and lower extremities.

Another interesting finding in this study is the trend of myoelectric levels among the working sessions. Based on the results obtained, this study observed that the myoelectric levels of muscles during the beginning of the workday are slightly lesser than middle of the workday. Consequently, the myoelectric levels of muscles during the middle of the workday are lesser than end of the workday. This is due to duration of performing work in standing position. The job tenure and measurement of muscle activity during beginning of the workday took 1 hour and 15 minutes; 2 hours of standing during middle of the workday and 2.5 hours during end of the workday. This study pointed that duration of standing can influence the myoelectric levels. When a worker is standing in a long period of time, static contraction of muscles can occur particularly in the back and legs. Due to static contraction, performance of the muscles may decrease and this condition can lead to discomfort and muscle fatigue [15].



This study proposes ergonomics control measures to reduce the risk level of prolonged standing. One of the best solutions is alternating the standing with sitting. As opposed to standing, sitting is a much less strenuous posture because it requires fewer muscles to be contracted to stabilize the body. In addition, when the processes jobs are performed in sitting position, the loading on the upper limbs will be uniformly distributed through the seat pan [16], hence reduces the loading on the lower limbs. However, sitting in long periods of time is also not good for the health. This can be done using a sit-stand stool. It enables a worker to perform jobs in sitting as well as standing position. Moreover, the sit-stand stool is equipped with a foot rest to provide comfort to the worker's legs. Also, it can be rotated 360 degrees so that the worker can reach the materials without twisting their body and consequently enlarge the degree of freedom to do the jobs.

Besides, application of anti-fatigue mat on the standing area can absorb pressure in the workers' feet due to hard standing floor [17-18]. Alternatively, providing a soft shoe-insole can reduce fatigue in the feet due to body mass and workload while performing processes jobs in prolonged standing [19]. Furthermore, administrative controls such as providing micro breaks in the working hours can be applied to minimize muscle fatigue due to prolonged standing. It has been proven that providing breaks in the working hours can minimize risk of leg swelling due to prolonged standing [20-21]. The advantage offered by the micro breaks is that the time interval and the foods taken by the workers during the breaks can refresh their energy and reduce fatigue due to previous work activities [14].

## **5.0 CONCLUSION**

This study has performed muscle activity measurement in the left and right erector spinae, left and right tibialis anterior, and left and right gastrocnemius of workers at metal stamping process lines and handwork section in a metal stamping company. All workers performed their tasks in standing position for prolonged time periods. The measurements of muscle activity were conducted at three working sessions: beginning of workday, middle of workday, and end of workday. During beginning of workday, the two groups of workers show a significant difference in myoelectric level in the right erector spinae, right gastrocnemius, and left tibialis anterior. On the other hand, the two groups of workers did not show any significant difference in myoelectric level during the middle of the workday and end of the workday. Therefore, this study concluded that muscle activity of the workers was determined

by the work load and duration of standing. This study suggests that anti fatigue mat to be positioned on the floor surface. Alternatively, providing micro breaks throughout the working hours can reduce muscle fatigue due to prolonged standing.

## ACKNOWLEDGEMENT

The authors would like to acknowledge the Ministry of Higher Education of Malaysia, the Universiti Teknikal Malaysia Melaka (UTeM), the Ministry of Science, Technology and Innovation (MOSTI) of Malaysia for funding this research under e-Science Research Grant, the Research Management Institute (RMI) of Universiti Teknologi MARA for providing facilities and assistance in conducting this study. Special thank also goes to Miyazu (M) Sdn. Bhd. for the permission and opportunity to facilitate a fruitful case study.

## REFERENCES

- [1] V. Balasubramanian, K. Adalarasu, and R. Regulapati, "Comparing dynamic and stationary standing postures in an assembly task," *International Journal of Industrial Ergonomics*, vol. 39, pp. 649-654, 2009.
- [2] F. Tomei, T. P. Baccolo, E. Tomao, S. Palmi, and M. V. Rosati, "Chronic venous disorders and occupation," *American Journal of Industrial Medicine*, vol. 36, pp. 653-665, 1999.
- [3] I. Halim, A. R. Omar, A. M. Saman, I. Othman, and M. A. Ali, "Analysis of time-to-fatigue for standing jobs in metal stamping industry," *Advanced Materials Research*, vol. 433-440, pp. 2155-2161, 2012.
- [4] N. Ahmad, Z. Taha, and P. L. Eu, "Energetic requirement, muscle fatigue, and musculoskeletal risk of prolonged standing on female Malaysian operators in the electronic industries: influence of age," *Engineering e-Transaction*, vol. 1, pp. 47-58, 2006.
- [5] H. H. H.-v. Reenen, B. Visser, A. J. v. d. Beek, B. M. Blatter, J. H. v. Dieen, and W. v. Mechelen, "The effect of a resistance-training program on muscle strength, physical workload, muscle fatigue and musculoskeletal discomfort: An experiment," *Applied Ergonomics*, vol. 40, pp. 1-8, 2009.
- [6] C. Astrom, M. Lindkvist, L. Burstrom, G. Sundelin, and J. S. Karlsson, "Changes in EMG activity in the upper trapezius muscle due to local vibration exposure," *Journal of Electromyography and Kinesiology*, vol. 19, pp. 407-415, 2007.

- [7] L. Mesin, R. Merletti, and A. Rainoldi, "Surface EMG: The issue of electrode location," *Journal of Electromyography and Kinesiology*, vol. 19, pp. 719-726, 2008.
- [8] C. Lariviere, D. Gagnon, D. Gravel, and A. B. Arsenault, "The assessment of back muscle capacity using intermittent static contractions. Part 1 - Validity and reliability of electromyographic indices of fatigue," *Journal of Electromyography and Kinesiology*, vol. 18, pp. 1006-1019, 2008.
- [9] N. W. Erika and J. P. Callaghan, "Changes in muscle activation patterns and subjective low back pain ratings during prolonged standing in response to an exercise intervention," *Journal of Electromyography and Kinesiology*, vol. 20, pp. 1125-1133, 2010.
- [10] I. Halim, A. R. Omar, and A. R. Ismail, "Posture, muscle activity and oxygen consumption evaluations among metal stamping operators: A pilot study in Malaysian Small and Medium Industries. *The Journal of The Institution of Engineers Malaysia*, vol. 72, pp. 47-57, 2011.
- [11] U. S. Department of Health and Humanities Services, "Selected topics in surface electromyography for use in the occupational setting: expert perspectives," *U. S. National Institute for Occupational Safety and Health*, Ed., 1992, pp. 1-151.
- [12] G. S. Murley, K. B. Landorf, H. B. Menz, and A. R. Bird, "Effect of foot posture, foot orthoses and footwear on lower limb muscle activity during walking and running: *A systematic review*," *Gait & Posture*, vol. 29, pp. 172-187, 2009.
- [13] B. Freriks and H. Hermens, "European Recommendation for Surface Electromyography, Result of SENIAM Project," *Roessigh Research and Development*, The Netherlands 2000.
- [14] I. Halim, A. R. Omar, A. Mohd Saman, and I. Othman, "Assessment of Muscle Fatigue Associated with Prolonged Standing in the Workplace," *Safety and Health at Work*, vol. 3, pp. 31-42, 2012.
- [15] A. H. Abdol Rahim, A. R. Omar, I. Halim, A. Mohd Saman, I. Othman, M. Alina, and S. Hanapi, Analysis of Muscle Fatigue during associated with Prolonged Standing Tasks in Manufacturing Industry. *International Conference on Science and Social Research (CSSR 2010)*, Kuala Lumpur, Malaysia, pp. 711-716, 2010.
- [16] K. Kroemer, H. Kroemer, and K. Kroemer-Elbert, *Ergonomics - How to Design for Ease and Efficiency*. New Jersey: Prentice Hall International Inc; 1994.
- [17] J. E. Zander, P. M. King, and B. N. Ezenwa, "Influence of flooring conditions on lower leg volume following prolonged standing," *International Journal of Industrial Ergonomics*, vol. 34, pp. 279-288, 2004.

- [18] P. M. King, "A comparison of the effects of floor mats and shoe in-soles on standing fatigue," *Applied Ergonomics*, vol. 33, pp. 477-484, 2002.
- [19] M-C. Chiu, and M-J. J Wang, "Professional footwear evaluation for clinical nurses," *Applied Ergonomics*, vol. 38, pp. 133-141, 2007.
- [20] J. H. Van Dieën., and H. H. Oude Vrielink, "Evaluation of work-rest schedules with respect to the effects of postural workload in standing work," *Ergonomics*, vol. 41, pp.1832-1844, 1998.
- [21] I. Halim, and A. R. Omar, "Development of prolonged standing strain index to quantify risk levels of standing jobs," *International Journal of Occupational Safety and Ergonomics*, vol. 18, pp. 85-96, 2012.